



# RF+Bluetooth RGBW Remote Controller

70200055



**Important:** Read All Instructions Prior to Installation

## Function introduction

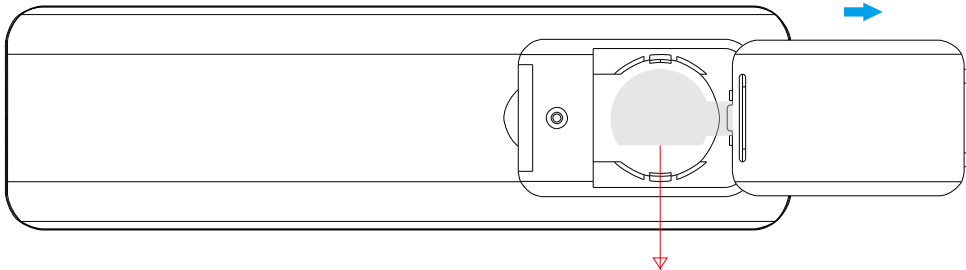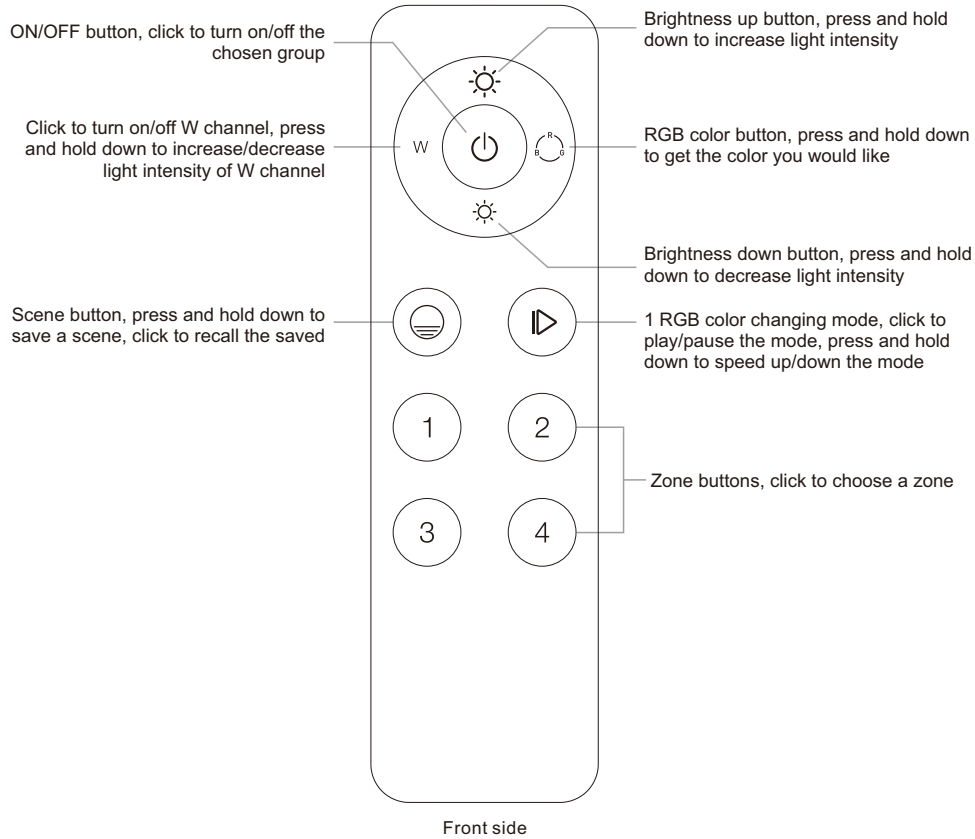

**Note:** Before the first use, please remove the protective film on the battery.

## Product Data


Protocol	RF+Bluetooth
Operation Voltage	3VDC (CR2025)
Transmission Frequency	2.4GHz
Transmission Range (free field)	30m
Protection Type	IP20
Dimming Range	0.1%-100%
Dimension	136.3x38.9x10.7mm
Protection Grade	IP20

- RF+Bluetooth RGBW remote control
- Enables to control 4 zones of receivers
- Easy & quick pairing to the RF+Bluetooth receivers by simply pushing the buttons
- Mesh network for further control distance, receivers can transmit signal to each other
- Each remote can control numerous receivers
- Each receiver can be paired to max. 8 remote controls
- The controlled receiver status can be quickly synchronized to the smart APP
- Transmission range between every two neighbor devices up to 30m
- Bluetooth low power consumption technology, long battery life
- With magnet on the back, easy fasten to & remove from the bracket
- Waterproof grade: IP20

## Safety & Warnings

- This device contains lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.


## Pair with RF+Bluetooth receiver

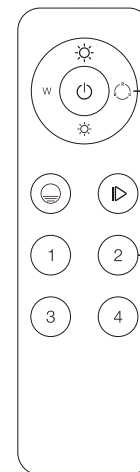

**Step 1:** Do wiring the receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).



**Step 2:** Click the "Prog. Key" or "Reset" button on RF+Bluetooth receiver (or reset power of the receiver 3 times continuously if the button is not accessible) to set it into pairing to RF remote status


**Step 4:** Then immediately click any other button except zone buttons (e.g. ) , LED lights connected with the receiver flicker once means the receiver is paired with zone 2 successfully.

**Step 3:** Click a zone button to select a zone (e.g. zone 2).

**Note:** one receiver can be paired with max 8 remote controls.

**If you use multiple receivers, you have two choices:**

- Option 1: have all the receivers in the same zone, like zone 1
- Option 2: have all the receivers in different zones, like zone 1, zone 2, zone 3 and zone 4

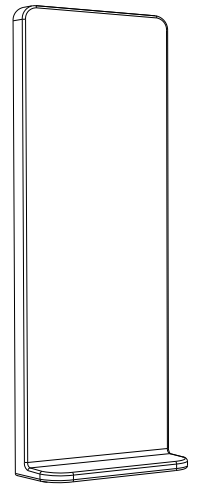

Magnetic Bracket