


**Important:** Read All Instructions Prior to Installation

**Product Data**

Power supply	AC100-240V, 50/60Hz
Power consumption	< 1.4W
Operating temperature	0 to 40°C
Relative humidity	8% to 80%
Dimensions	25x20x10mm

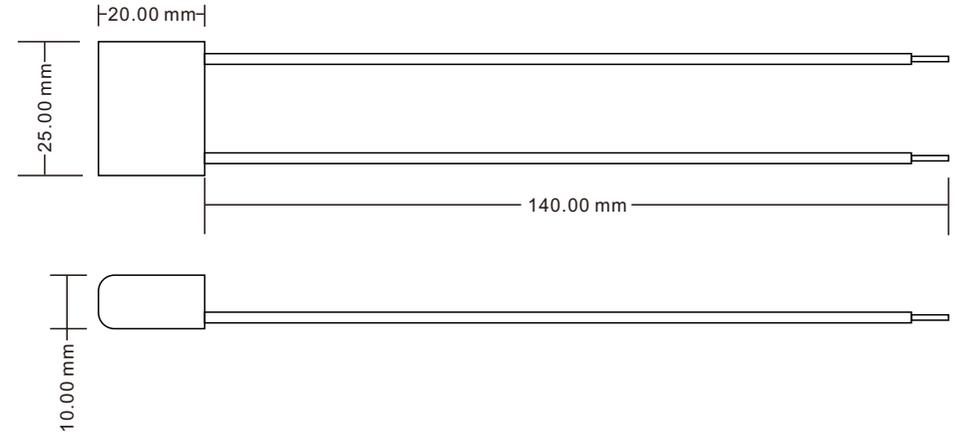

**Safety & Warnings**


- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

**Product Description**

The Bypass is a device designed to work with 2-wire dimmer or switch with no neutral wire, to be used with LED bulbs or energy saving compact fluorescent lamps. The Bypass prevents LEDs from flickering and turned off compact fluorescent lamps from glowing.

In 2-wire connection the Bypass reduces the minimum power of load required by the dimmer or switch for correct operation. The Bypass provides powering of the dimmer or switch in case of controlling low loads.

**Wiring Diagram**

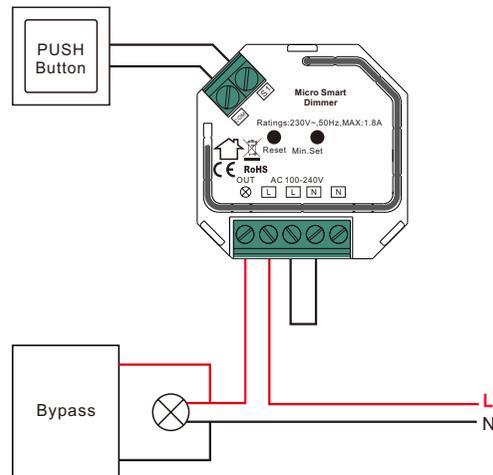

**Note:** Please follow the detailed wiring diagram of corresponding 2-wire dimmer or switch.