




Bluetooth mesh wireless lighting control  
**Product Specification Sheet**

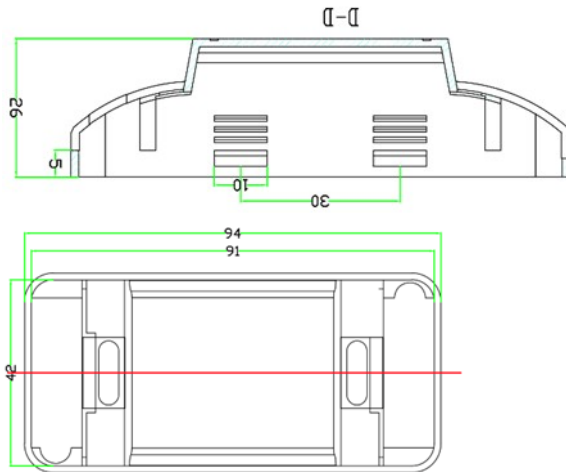

|                                             |                                                            |        |
|---------------------------------------------|------------------------------------------------------------|--------|
| Product Type                                | RECEIVER                                                   |        |
| Product Number                              | TEQ-9080A-EN                                               |        |
| Load type                                   | Curtain/Blind motor                                        |        |
| Product Dimensions                          | Length                                                     | 94.0mm |
|                                             | Width                                                      | 45.0mm |
|                                             | Height                                                     | 26.0mm |
| Receiver Type                               | Curtain Controller – on/off                                |        |
| Connection Type                             | Radio Frequency (RF) + Bluetooth Low Energy (BLE) Wireless |        |
| Electrical Input                            | 100-240v AC                                                |        |
|                                             |                                                            |        |
| Electrical Output                           | 100-240v AC                                                |        |
|                                             | Maximum 2A                                                 |        |
| Ingress Protection Rating                   | IP20                                                       |        |
| Easy set up via Systeql H2A App             |                                                            |        |
| Supports AC push switch                     |                                                            |        |
| Comes with pre-wired 4 pole plug and socket |                                                            |        |